
REVISIONS
Updated properties list

REV 1 BY MM DATE 09/21/2015

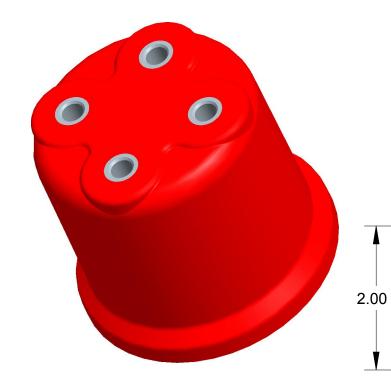

>10000

>4000

>50000

Physical and Electrical Properties
Tensile Strength (lbs)

Cantilever Strength (lbs)
Compression Strength (lbs)

Thread Stripping Torque (ft. lbs) 30
Arc Resistance (sec. ASTM D495) 180+
Water Absorption (% in 24 hrs @ 23 deg C) 0.15


Water Absorption (% in 24 hrs @ 23 deg C) 0.15 Creep Distance (in.) 4.50

Max Temperature 130 deg C
UL subject 94 Flame Resistance 94 V-0

UL Listed E84767

BRASS INSERTS AND OTHER INSERT SIZES AND COMBINATIONS ARE AVAILABLE UPON SPECIAL REQUEST

AVAILABLE THREADS					
UNC THREAD STYLES					
PART NUMBER	TOP INSERT SIZE	BOTTOM INSERT SIZE MATERIAL			
6350-S10 4X2	3/8-16 X 5/8	3/8-16 X 5/8	STEEL		
6350-S10 4X4	3/8-16 X 5/8	3/8-16 X 5/8	STEEL		
6350-S6/S10 4X1	1/2-13 X 5/8	3/8-16 X 5/8	STEEL		
6350-S8/S10 4X1	5/8-11 X 3/4	3/8-16 X 5/8	STEEL		
6350-S6/S10 2X1	1/2-13 X 5/8	3/8-16 X 5/8	STEEL		
6350-S10	3/8-16 X 5/8	3/8-16 X 5/8	STEEL		
6350-S81/M10-S10/M10	M10X1.5X1	M10X1.5X5/8	STEEL		
6350-S6/S10 4X4X1	1/2-13 X 5/8	3/8-16 X 5/8	STEEL		

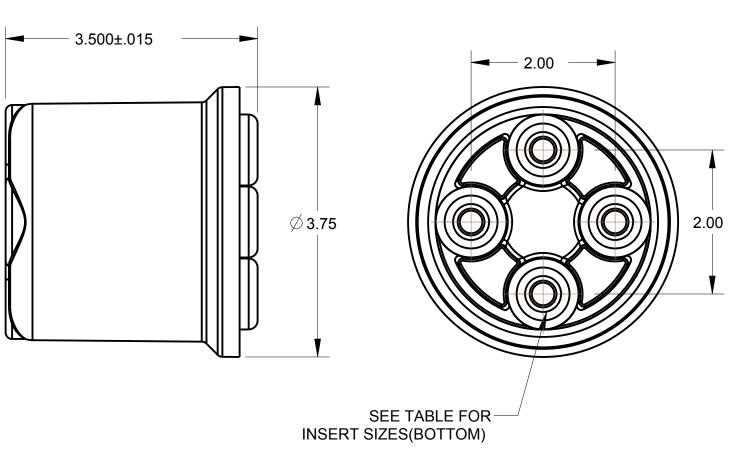


4X4 CONFIGURATION


OVER SURFACE SPACING (CREEP DISTANCE) = 4.50 "


SEE TABLE FOR INSERT SIZES (TOP)


2.00 —


CONFIDENTIAL This print and the specifications are the property of Mar-Bal Inc. and has been issued with the understanding that it will not be reproduced, revealed to or used for manufacture for others, and will be returned upon request.		MAR-BAL, Incorporated 5400 Reserve Way Dublin, VA 24084 www.mar-bal.com	
	6000 SERIES INSULATORS		
	PART NUMBER:		SUGGESTED INDOOR RATING:
	6350-X	X	5.0 kV
DATE: 7-AUG-2008	SHEET 1 C	F 2	SCALE 1.000

















4X2 CONFIGURATION

















MAR-BAL, Incorporated

4X1 CONFIGURATION

4X4X1 CONFIGURATION

5400 Reserve Way Dublin, VA 24084 CONFIDENTIAL
This print and the
specifications are the
property of Mar-Bal Inc.
and has been issued with
the understanding that it
will not be reproduced, www.mar-bal.com TITLE 6000 SERIES INSULATORS PART NUMBER: SUGGESTED INDOOR RATING: revealed to or used for manufacture for others, and will be returned upon 6350-XX 5.0 kV request. SHEET 2 OF 2 SCALE 0.375 DATE: 7-AUG-2008